

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371**

U.S. APPLICATION NO. (If known see 37 C.F.R. 1.5)

**09/674816**

INTERNATIONAL APPLICATION NO.

**PCT/GB99/01392**

INTERNATIONAL FILING DATE

**05 MAY 1999**

(EARLIEST) PRIORITY DATE CLAIMED

**06 MAY 1998**

TITLE OF INVENTION

**NETWORKED CONDITIONAL ACCESS MODULE**

APPLICANTS FOR DO/EO/US

**Richard John BARRY, Adrian Charles PASKINS**

Applicants herewith submit to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
  - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ has been transmitted by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)), including **15** sheets of formal drawings and a copy of the International Search Report.
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventors (35 U.S.C. 371(c)(4)).
10. ☐ The annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

**Items 11. to 16. below concern other document(s) or information included:**

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A FIRST preliminary amendment.  
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:

PCT/ISA/210, 220, PCT/RO/101

References for IDS

**EXPRESS MAIL**Mailing Label Number: **EL585033076US**Date of Deposit: **November 6, 2000**

I hereby certify that this paper or fee is being deposited with the United States Postal Service

"Express Mail Post Office to Addressee" Service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents and Trademarks, Box PCT Washington, DC 20231.

*Charles Jackson*  
(Typed or printed name of person mailing paper or fee)*Charles Jackson*  
(Signature of person mailing paper or fee)

09/674816

17. ☒ The following fees are submitted:

(CALCULATIONS /PTO USE ONLY)

**Basic National Fee (37 CFR 1.492(a)(1)-(5):**

Neither international preliminary examination fee (37 CFR 1.482) nor  
international search fee (37 CFR 1.445(a)(2)) paid to USPTO and  
International Search Report not prepared by the EPO or JPO... \$1000.00

International preliminary examination fee (37 C.F.R. 1.482)  
not paid to USPTO but International Search Report prepared  
by the EPO or JPO.....\$ 860.00

International preliminary examination fee paid to USPTO (37 CFR 1.482)  
Not paid to USPTO but international search fee (37 CFR 1.445(a)(2))  
paid to USPTO (37 CFR 1.445(a)(2)).....\$ 710.00

International preliminary examination fee paid to USPTO (37 CFR 1.482)  
But all claims did not satisfy provisions of PCT Article 33(1)-(4).....\$ 690.00

International preliminary examination fee paid to USPTO (37 CFR 1.482)  
and all claims satisfied provisions of PCT Article 33(1)-(4).....\$ 100.00

ENTER APPROPRIATE BASIC FEE AMOUNT = (\$ 860.00)

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492(e)). (\$ /

28 Claims	/Number Filed	/	Number Extra	/Rate	(
Total Claims	/ 28 - 20 =	/	8	/X \$18.00	(\$ 144.00
Independent Claims	/ 5 - 3 =	/	2	/X \$80.00	(\$ 160.00
Multiple dependent claim(s) (if applicable)				/+ \$260.00	(\$

**TOTAL OF ABOVE CALCULATIONS = (\$ 1,164.00**

Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity (statement must also be filed. (Note 37 CFR 1.9, 1.27, 1.28). ( /

**SUBTOTAL = (\$ 1,164.00**

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492(f)).+ (\$ /

**TOTAL NATIONAL FEE = (\$ 1,164.00**

Fee for recording the enclosed assignments (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property + (\$ 0.00/ (\$ /

**TOTAL FEES ENCLOSED = (\$ 1,164.00**

(Amount to be: /  
(refunded /\$  
(charged /\$

- a. ☒ Our checks in the amount of **\$1,164.00** to cover the above fees is enclosed.  
b. ☐ Please charge my Deposit Account No. 50-0320 in the amount of \$\_\_\_\_\_ to cover the above fees.  
A duplicate copy of this sheet is enclosed.  
c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 50-0320. A duplicate copy of this sheet is enclosed.  
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

**WILLIAM S. FROMMER  
FROMMER LAWRENCE & HAUG LLP  
745 FIFTH AVENUE  
NEW YORK, NEW YORK 10151**

Dated: November 6, 2000

SIGNATURE

**WILLIAM S. FROMMER**  
NAME

25,506  
REGISTRATION NUMBER

NETWORKED CONDITIONAL ACCESS MODULE

The present invention relates to a networked conditional access module and methods of implementing such a module on a network. More particularly, it relates to the provision of a Conditional Access Subunit for an IEEE 1394 network.

With the development of digital multi-media and in particular digital television, it has been proposed to provide a conditional access module. In the field of digital video processing, it is known to code digital video signals such that special processing is needed in the receiver to be able to reproduce the video signals. In particular, it has been proposed to provide a conditional access module which can perform all of the descrambling and other conditional access functions of the digital TV receiver. This allows conditional access and signal decoding functions to be separated from a host receiver, such that a generic digital TV receiver can operate with many different conditional access systems in different conditional access modules.

To allow communication between a conditional access module and a digital TV receiver, a common interface has been proposed and standardized by CENELEC (EN50221 Common Interface Specification for Conditional Access and other Digital Video Broadcasting Decoder Applications). This standard Common Interface defines a transport stream interface in which various virtual channels are time multiplexed and a command interface over which various additional command data are sent. The common interface thus allows connection of a conditional access module to a digital TV receiver or indeed any other digital video device.

As a basis for the present invention, it is now recognised that it would be advantageous to provide a conditional access module on a local network of digital multi-media devices including audio and video devices, such that the various functions available in the conditional access module could be provided to all of the devices on the network.

A standard has been proposed for connecting together various digital video devices on a local network. In particular, IEEE 1394 - 1995 is an IEEE standard for a high performance serial bus. It defines a bus, which will be referred to as an IEEE 1394 serial bus, for connecting together various digital consumer audio/visual products.

The IEEE 1394 specification defines a physical link connector, electrical signalling and a set of link and transaction protocols allowing the serial bus to self configure and carry audio, video and control information efficiently. A further set of additional protocols have also been defined to carry MPEG data and provide control mechanisms between different items of equipment on the IEEE 1394 serial bus. These protocols are defined in the specification "Digital Interface for Consumer Electronic Audio/Video Equipment" (IEC61883).

The IEC61883 specification enables several command protocols to be used. One set of commands are known as audio/video control - command transactions (AV/C-CTS) and are specified in the AV/C Digital Interface Command Set Document development by the IEEE 1394 Trade Association (see AV/C Digital Interface Command Set Version 2.0D March 26, 1997 Audio/Video Working Group of the 1394 Trade Association). The AV/C CTS defines a command set for consumer and professional audio/visual equipment. The AV/C CTS commands are carried within the FCP (Function Control Protocol) packet format defined by IEC61883.

An object of the present invention is to provide means by which a conditional access module may be provided on an IEEE 1394 network.

According to the present invention, there is provided a method of providing a Conditional Access Module on an IEEE 1394 network, the method comprising:  
defining a Conditional Access Module as a Conditional Access Subunit of the IEEE 1394 network;

providing AV/C Conditional Access Commands to allow communication between the Conditional Access Subunit and other Subunits on the network.

According to the present invention, there is provided a conditional access  
5 subunit for connection to an IEEE 1394 network, the subunit including:  
means to receive AV/C Conditional Access Commands over the IEEE 1394 network from another subunit; and  
means to transmit AV/C responses over the IEEE 1394 network in response to the received AV/C Conditional Access Commands.

10

According to the present invention, there is provided a subunit for use with a conditional access subunit on an IEEE 1394 network, the subunit including:

means to transmit AV/C Conditional Access Commands over the IEEE 1394 network to the conditional access subunit; and  
15 means to receive AV/C responses from the conditional access subunit over the IEEE 1394 network in response to the transmitted AV/C Conditional Access Commands.

In this way, by treating the conditional access module as a subunit of the  
20 IEEE 1394 network and by providing conditional access commands as part of the AV/C command set, a conditional access module can be fully integrated on the network.

Preferably, the conditional access command includes a CA enable command  
25 and/or a CA entitlement command. The AV/C conditional access commands may also include a security command.

In this way, the CA enable command can be used to instruct the CA subunit as to which service is should descramble.

30

The enable command may include control commands as well as status and notify commands.

5 The CA entitlement commands may be used to interrogate the conditional access subunit to determine what entitlement the user has to services. It may be a status or notify type command.

10 According to the present invention, there is also provided a conditional access subunit for connection to an IEEE 1394 network for use in descrambling a transport stream received over the network wherein the conditional access subunit, having descrambled the transport stream, introduces a local scrambling before retransmitting the transport stream to other subunits on the network, such that only authorised subunits on the network capable of local descrambling can receive the information in the transport stream.

15 In this way, once a conditional access subunit has descrambled a program, the program does not become available for unauthorised copying. It can be transported only to an authorised subunit on the network, for instance a television display. This system can also be used to ensure that a particular conditional access subunit can  
20 only be used in conjunction with other particular types of subunit with the same local descrambling capabilities.

According to the present invention there is also provided a conditional access subunit for connection to an IEEE 1394 network having a tuner subunit, the  
25 conditional access subunit having means for periodically contacting the tuner subunit to request the received transport stream for a period of time sufficient to allow the conditional access subunit to update the entitlement management messages stored in the conditional access subunit.

30 In this way, even if a user does not operate the conditional access until for some time, such that entitlement information would have otherwise been missed, the

conditional access subunit automatically requests transport stream information periodically so as to obtain that entitlement information.

5 The present invention will be more clearly understood from the following description, given by way of example only, with reference to the accompanying drawings, in which:

Figure 1 illustrates a CA subunit;

10 Figure 2 illustrates CA subunit logic connections;

Figure 3 illustrates a CA subunit identifier descriptor;

15 3;  
Figure 4 illustrates a system specification for use with the descriptor of Figure

Figure 5(a) illustrates a CA status descriptor;

20 Figure 5(b) illustrates a CA subunit status area info block;

Figure 5(c) illustrates a source plug status area info block;

Figure 5(d) illustrates a plug status info block;

25 Figure 6 illustrates CA subunit commands;

Figure 7(a) illustrates a CA enable control command;

30 Figure 7(b) illustrates the broadcast system specific data of Figure 7(a);

Figure 7(c) illustrates an elementary PID definition of Figure 7(b);

Figure 8(a) illustrates a CA enable response;

5 Figure 8(b) illustrates the broadcast system specific data of Figure 8(a);

Figure 9 illustrates status or notify command structure;

Figure 10 illustrates status or notify response structure;

10

Figure 11(a) illustrates a CA entitlement command;

Figure 11(b) illustrates the broadcast system specific data of Figure 11(a);

15 Figure 12(a) illustrates a CA entitlement response;

Figure 12(b) illustrates the broadcast system specific data of Figure 12(a);

Figure 13 illustrates a security control command;

20

Figure 14 illustrates command exchange between controller and CA subunit;  
and

25 Figure 15 illustrates a satellite IRD connected to a network conditional access  
module.

30 A requirement exists for a Conditional Access (CA) system that allows the  
manufacturer of a Digital Television Receiver (DTV) to access scrambled services  
from several broadcasters. This is achieved by defining a protocol that allows the  
CA system to reside on a module which can then be connected to the DTV allowing  
that DTV to access the service. A solution exists in the form of a PC Card connected



to a single receiver. However there exists a new requirement for a Networked Conditional Access Module (NCAM). The main requirements for this device are:-

- flexible form factor
- 5      • flexible access, for example peer to peer communication
- flexible location

This application proposes the format of the additional AV/C subunits that are required to implement the NCAM. The AV/C model for the NCAM will provide a  
10 conditional access system that is tailored for use on an IEEE 1394-1995 based digital network.

The purpose of the Networked Conditional Access Module (NCAM) is to provide conditional access functionality. The NCAM uses a logical collection of  
15 resources that allow the descrambling of selected services to take place. The required resources for the NCAM can exist either in one location, for example inside a DTV, or be distributed throughout the In Home Digital Network (IHDN).

The NCAM relies on both existing and additional subunits. The existing  
20 subunits that the NCAM makes use of are:-

- Tuner subunit
- Panel subunit

25      In order to implement a networked conditional access module on an IEEE 1394 network, an AV/C subunit is defined for the conditional access module. In particular, a conditional access subunit models the core functionality of a descrambler. The CA subunit receives scrambled streams, descrambles them and then outputs a descrambled stream. The CA subunit may communicate with other  
30 required subunits via asynchronous commands across the IEEE 1394 network.

The Tuner subunit is used as the data source, the Panel subunit is used to provide information to the user and receive input from the user. The CA subunit contains the descrambling functionality and can make use of smart card and modem subunits.

5

The resources that are required for an NCAM to function may be implemented privately within a single module. If a manufacturer wishes to develop an NCAM with the smart card and modem functionality integrated for the exclusive use of the NCAM this is allowed. In such a case the NCAM would only implement the CA subunit and make use of the tuner and panel subunits in other devices. It is likely for security reasons that an NCAM would be implemented with a private smart card. The smart card subunit is included for when a smart card could be used for other applications, for example a data card or "electronic cash" card.

10

The NCAM can also be implemented with distributed resources. In this case the CA subunit would work in conjunction with subunits embedded in other objects distributed throughout the digital network.

15

Depending on the service to be descrambled, all or some of the resources will be required. In a simple system that relies on a Smart Card to be inserted to authenticate the service the modem is not required, a simple form of display device is required to prompt the user to insert the card but interaction is not necessary. A more complicated system, for example a pay per view (PPV) system, requires all of the resources to allow a choice of services to be presented to the user and to allow the user make a selection. Therefore the NCAM may operate with reduced functionality if not all the required subunits are present.

20

25

Figure 1 illustrates the basic CA subunit 2. This can be a stand alone device or integrated into another device.

30

The CA subunit destination plug 4 is the input to the subunit 2. The signal format is compliant with the system(s) supported by the CA mechanism. The CA subunit destination plug 4 can connect either directly to the serial bus (1394) input plug or to the source plug of another suitable subunit; for example the input to the CA subunit could be a tuner subunit.

The CA subunit source plug 6 is the output of the subunit 2. The signal format is compliant with the system(s) supported by the CA mechanism. The CA subunit source plug 6 can connect either directly to the serial bus output plug or to the destination plug of another suitable subunit.

A CA subunit that implements a single source and destination plug is potentially capable of descrambling one or more services within an isochronous channel from a single source, providing the CA system is compatible with the source material.

Depending on the hardware capability of the CA subunit it is possible to implement multiple destination and source plugs. There are an equal number of source and destination plugs. Such a configuration allows a single CA subunit to provide descrambling of several independent streams/services at the same time. This model allows a very flexible, distributed AV network environment.

Thus, in other words, the CA subunit can receive different streams from one or more other subunits on the network, descramble them and re-route them to one or more other subunits as required. Any limitation is due principally only to bandwidth.

When making connections between the CA subunit destination plug and either the serial bus input or another subunit the connection is established manually using a CONNECT command. This connection is made before issuing a CA command. If the CA subunit is operating in a stand-alone mode then the destination

-10-

and source plugs of the subunit can be permanently connected to the input and output serial bus plugs.

5 If the CA subunit has an existing connection which has been locked and an additional connection is requested then a response of REJECTED is returned. If the connection is permanent then the conflicting command generates a response of NOT IMPLEMENTED.

10 The CONNECT command is used to connect the CA subunit source plugs to either another subunit or the serial bus output plugs.

15 All current connections of CA subunits are reported by the CONNECT status or CONNECTIONS status commands. This includes all permanent connections. A controller can determine if a connection is permanent by examining the "perm" flag of the responses for the CONNECT status and CONNECTIONS status commands.

20 The connection of the CA subunit to other subunits is implementation specific. Whether it is logical to allow the connection of the CA subunit to certain other subunits is considered at implementation time.

25 A CA subunit may be embodied inside a receiver, which is a device defined as one that contains a tuner subunit, or as a stand-alone device. Figure 2 illustrates how a CA subunit appears in a receiver 8; in a stand-alone device, there would likely be no antenna input plug (only 1394 serial bus and possibly "external" input plugs).

The following table illustrates the various combinations of connections between a receiver unit and a CA subunit plugs and which ones are valid or not. All invalid connections generate a response of NOT IMPLEMENTED.

5

10

15

20

Non CA Subunit Plug	CA Subunit Plug	Connection Valid ?	Comments
External antenna input plug	CA destination plug	NO	X
External antenna input plug	CA source plug	NO	X
External input plug	CA destination plug	NO	X
External input plug	CA source plug	NO	X
External output plug	CA destination plug	NO	X
External output plug	CA source plug	NO	X
Serial bus input plug	CA destination plug	YES	This connection must be created using a CONNECT command, or it may be a permanent connection
Serial bus input plug	CA source plug	NO	X
Serial bus output plugs	CA destination plug	NO	X
Serial bus output plugs	CA source plug	YES	This connection must be created using a CONNECT command, or it may be a permanent connection
Subunit source plug	CA destination plug	YES	This connection must be created using a CONNECT command, or it may be a permanent connection
Subunit source plug	CA source plug	NO	X
Subunit destination plug	CA destination plug	NO	X
Subunit destination plug	CA source plug	YES	This connection must be created using a CONNECT command, or it may be a permanent connection

When issuing the CONNECT Command the lock bit is used to ensure that connections are not broken by third parties.

The CA subunit can handle both full and partial transport streams. It is beneficial for the source to create a partial transport stream containing the elements of the service it wishes descrambled in order to save bandwidth on the bus. In the case where a partial transport stream is created and the EMMs (Entitlement Management Messages) are embedded in the transport stream, the source includes the EMMs in the partial transport

stream. It will not be possible for the CA subunit to descramble the desired services if the data contained in the EMMs is not present.

The CA system is used to prevent unauthorised access to broadcast material. Once the material has been descrambled, it can be protected when carried over the IHDN  
 5 (In Home Digital Network). In particular, the CA subunit can implement a suitable Copy Protection system on both its destination and source plugs.

The CA subunit is provided with a subunit identifier. For each particular CA subunit, the subunit identifier describes the characteristics of the broadcast system(s) and CA system(s) supported by that CA subunit. More than one broadcasting system and  
 10 CA system may be supported by a particular CA subunit. With the use of this information, other subunits on the network, particularly, the controller, will know how each CA subunit may be used.

Figure 3 illustrates the subunit dependent information which is contained within the subunit identifier descriptor.

15 The *CA\_subunit\_dependent\_info\_fields\_length* field specifies the number of bytes for the non-info block fields of the subunit dependent information; in this case, through the system\_specification[n-1].

A controller on the network preferably finds any number of information blocks following this field, such that the CA subunit dependent information can be extended  
 20 in the future. Controllers can easily determine if any info blocks exist here by comparing the *CA\_subunit\_dependent\_length* and *CA\_subunit\_dependent\_info\_fields\_length* fields. If the following formula is true:

$$CA\_subunit\_dependent\_length > (CA\_subunit\_dependent\_info\_fields\_length + 2)$$
 then info blocks exist in this structure.

25 The *CA\_subunit\_version* field indicates the version number of CA subunit command specification that the CA subunit conforms to. The upper 4 bits show the major version number and the lower 4 bits the minor version number.

CA_subunit_version	meaning
10 <sub>16</sub>	Version 1.0 of the CA subunit specification
all others	Reserved for future specification

5

The *number\_of\_systems* field specifies how many broadcast systems are supported by this CA subunit.

10 The *system\_specification* field describes each broadcast system and is illustrated in Figure 4.

The *specification\_length* field indicates the size, in bytes of the entire *system\_specification* structure.

15

The *system\_id* field indicates a broadcast system that the CA subunit supports. The following broadcast systems are currently defined:

system_id	name
20 <sub>16</sub>	DVB
other values	reserved

20

25 The *implementation\_profile\_id* field specifies the profile ID of the CA subunit for this *system\_id*. A CA subunit may be implemented with a different profile for each of the broadcast systems that it supports. There is one profile for each supported system.

The following profiles are defined:

implementation_profile_id	meaning
E0 <sub>16</sub>	conformant_implementation - a CA subunit with this implementation profile ID was created based on the AV/C CA Specification version 1.0. The set of features (commands and data structures) supported by this implementation is defined by the manufacturer. This profile ID applies to all broadcast systems.
E1 <sub>16</sub>	conformant_full_implementation - a CA subunit with this profile implementation is as described above, but it implements all of the commands and relevant data structures for the specified broadcast system, as defined in the AV/C CA Specification version 1.0. This profile ID applies to all broadcast systems.
All other values	reserved for future specification in this AV/C CA Specification

The *number\_of\_CA\_system\_ids* field indicates the number of CA systems the CA subunit is compatible with.

The *CA\_system\_id* fields identify a particular CA system. The values for *CA\_system\_id* are systemic dependent and in the DVB case they are defined in pr ETS 300468 Specification for Service Information (SI) in Digital Video Broadcasting (DVB) Systems. The *CA\_system\_id\_length* field defines the length in bytes of the *CA\_system\_id* field.

For each CA subunit, there is also a CA status descriptor. This holds information about the CA subunit in general, and about the information that is on each of its source plugs. The data held within this structure is dynamic and is kept up to date by the CA subunit. A controller may examine this structure in order to determine the operational status of the CA subunit and its source plugs.



The general format of the CA status descriptor is shown in Figure 5(a).

The *descriptor\_length* is the number of bytes for the CA subunit status descriptor structure, not including the *descriptor\_length* field.

5

The CA subunit status area info block is illustrated separately in Figure 5(b) and the source plug status area info block is illustrated separately in Figure 5(c).

10 The general CA subunit status area info block contains status information about the CA subunit that is not specific to a particular destination or source plug.

The *compound\_length* field specifies the number of bytes for the remainder of this information block (including any nested information blocks which may occur after the last well defined field).

15

The *primary\_field\_length* is the number of bytes for the remaining fields.

20 The *available\_bandwidth\_upper* and *available\_bandwidth\_lower* fields are read together and indicate the bandwidth capacity the CA subunit has available. The *available\_bandwidth\_upper* field indicates the integer amount of bandwidth available in Mbps. The *available\_bandwidth\_lower* indicates the fractional amount of bandwidth available in Mbps.

25 For example, if the CA subunit has 34.8Mbps of bandwidth available it would be represented as follows.

*available\_bandwidth\_upper* = 00 22<sub>16</sub>

*available\_bandwidth\_lower* = 08<sub>16</sub>

The values of 0F FF<sub>16</sub> for *available\_bandwidth\_upper* and FF<sub>16</sub> for *available\_bandwidth\_lower* are reserved and indicate that the CA Subunit cannot determine the amount of available bandwidth.

- 5           This allows a device such as a tuner subunit to determine whether the CA subunit has enough spare capacity for additional services to be descrambled. If the CA subunit can support the simultaneous descrambling of multiple services from multiple sources then the *available\_bandwidth* can be read in conjunction with the *destination\_plug\_status* fields to allow a controller to determine whether it is able to
- 10          connect an additional source to the CA subunit.

- With respect to the source plug status area info block of Figure 5(c), the *number of source plugs* field specifies the number of source plugs on the particular subunit and, hence, the number of *plug status info block* structures that are nested in this info block.
- 15          The structures are located sequentially and not nested inside of each other. Most CA units will have only one source plug.

- The *plug status info block (x)* fields are illustrated separately in Figure 5(d) and provide status information for each of the source plugs. There is one of these structures
- 20          for each source plug on the CA subunit, even if the plug currently has no status information to report. As shown, the fields are each split into two general areas.

            The *source\_plug* field indicates the actual source plug number.

- 25          The *destination\_plug* field indicates the *destination\_plug* number that this *source\_plug* is relevant to.

The *status* field describes the current situation of the *source\_plug* according to the table below.

5

value	status description
00 <sub>16</sub>	No information instances are on the specified source plug.
10 <sub>16</sub>	A descrambled version of the service(s) requested for descrambling is(are) currently on the specified source plug.
20 <sub>16</sub>	A descrambled version of the service(s) requested should be on the specified source plug, however it is (they are) not currently on the plug.

10

Case 10<sub>16</sub> is used when the CA subunit is functioning correctly and is outputting the requested service in a descrambled state. Case 20<sub>16</sub> is used when the CA subunit has responded that it can descramble the selected service but at present the descrambled service is not available on the plug.

15

The CA subunit Status descriptor is specific to the CA subunit type; it has the following type value.

descriptor_type	meaning
80 <sub>16</sub>	CA Status Descriptor

20

The *descriptor\_type\_specific\_reference* field does not exist because there is only one CA status descriptor for a CA subunit.

The CA subunit model does not feature any object lists.

25

The CA subunit commands are illustrated in Figure 6.

### CA Enable

5           The CA enable command is used to instruct the CA subunit as to which service it should descramble. The command is broadcast specific. The CA enable control command is illustrated in Figure 7(a) with the broadcast systems specific data illustrated in Figure 7(b) and the elementary PID definition illustrated in Figure 7(c).

10           The *system\_id* field denotes which broadcast system the following command relates to. The following systems are currently defined:

system_id	name
20 <sub>16</sub>	DVB
Other values	reserved

15

The *broadcast\_system\_specific\_data* field contains operands that are specific to the system being used.

20           For the DVB System the operands of Figure 7(b) fully specify the service to be descrambled. The PID (Packet Identifier) for each component of the service is identified.

25           If one of the component subunits of a controller is a tuner subunit then the controller has the *service\_id* and PID values available to it privately. However, if a controller wishes to make use of another suitable receiving device then the controller must inspect the service and component descriptors of the tuner subunit in the receiving device. The controller must define the PIDs of the components of the desired service.

A separate CA\_ENABLE command is sent for each service that is to be descrambled. The action field is used to update the list of selected services stored in the CA subunit. The following values are defined.

5	<b>action</b>	<b>value</b>
	add	00 <sub>16</sub>
	update	10 <sub>16</sub>
	remove	20 <sub>16</sub>
10	remove_all	30 <sub>16</sub>
	reserved	Other values

When action is set to "add" the selected service is added to the list of services selected for descrambling. "update" indicates that a selected service should be modified in some way. Since the list management commands only act at the program level, any changes at the elementary stream level in an existing service must be signalled by an 'update' command with the complete elementary stream list re-sent. "remove" allows one service to be deleted from the list. "remove\_all" is used when the descrambling of all services is no longer required.

20 The *service\_id* field specifies the service to which the *program\_map\_PID* is applicable.

The *number\_of\_elementary\_PID\_definitions* field indicates the number of following elementary\_PID fields.

25 Each of the elementary PID fields correspond to the example illustrated in Figure 7(c).

30 The *stream\_type* field identifies the type of service element carried within the packets with the PID whose value is specified by the elementary\_PID. The values are defined in table 2-29 of ISP/IEC 13818-1 Generic Coding of Moving Picture and Associated Audio Systems.

The *elementary\_PID* field specifies the PID of the transport stream packets that carry the associated service element.

5 Having received a CA enable control command, the CA subunit will produce a response as illustrated in Figure 8(a), with the broadcast systems specific data illustrated in Figure 8(b).

10 The operands have the same meaning as for the CA enable control command and the response format is the same as for the control command with the addition of the status operand.

In the case where the action is "add" or "update" and the CA enable command is successful, the response will be ACCEPTED. *status* can take on the following values. The value of *status* reflects the *action*.

15

action	status	Value
add	descrambling	00 <sub>16</sub>
add	descrambling possible under conditions (purchase dialog)	01 <sub>16</sub>
add	descrambling possible under conditions (technical dialog)	02 <sub>16</sub>
20 update	descrambling	10 <sub>16</sub>
update	descrambling possible under conditions (purchase dialog)	11 <sub>16</sub>
update	descrambling possible under conditions (technical dialog)	12 <sub>16</sub>
remove	remove_successful	20 <sub>16</sub>
remove_all	remove_successful	30 <sub>16</sub>

25

30 In the case where an add or update command is successful then the response is scrambling. However there may be some cases where it is theoretically possible to descramble the service but there are certain conditions that must first be satisfied. The scrambling possible under conditions messages are returned in this case. There are two types of conditional responses, purchase dialogue and technical dialog. Both dialogs require an interaction with the user via the man machine interface (MMI).

The purchase dialog is required, for example, where the user has requested a pay per view service. Here a dialog with the user might be required to confirm the cost of the service before viewing can commence.

- 5           The technical dialog is required when there is a technical issue to overcome before the CA subunit can determine whether it is possible or not to descramble the service. This could occur, for example, when the user needs to insert the smart card.

- 10           In the case where the CA\_ENABLE command is unsuccessful the response frame will use the response code of REJECTED. The *status* field will take on the following values to reflect the nature of the error. The value of *status* reflects the *action*.

	action	status	Value
15	add	descrambling not possible	80 <sub>16</sub>
	add	descrambling not possible (because no entitlement)	81 <sub>16</sub>
	add	descrambling not possible (for technical reasons)	82 <sub>16</sub>
	add	descrambling not possible (insufficient bandwidth in CA subunit)	83 <sub>16</sub>
	add	descrambling not possible (incompatible CA system)	84 <sub>16</sub>
20	update	descrambling not possible	90 <sub>16</sub>
	update	descrambling not possible (because no entitlement)	91 <sub>16</sub>
	update	descrambling not possible (for technical reasons)	92 <sub>16</sub>
	update	descrambling not possible (insufficient bandwidth in CA subunit)	93 <sub>16</sub>
	update	descrambling not possible (incompatible CA system)	94 <sub>16</sub>
25	remove	remove failed - service not present	A0 <sub>16</sub>
	remove	remove failed - unknown reason	A1 <sub>16</sub>
	remove_all	remove failed - service not present	B0 <sub>16</sub>
	remove_all	remove failed - unknown reason	B1 <sub>16</sub>

- 30           The CA enable command can also be sent with a ctype of STATUS and NOTIFY. These are signified by "S" and "N" in Figure 6. The status and notify command frames have the same form as the control command. The command is used to determine whether the CA subunit is capable of descrambling the selected service. The broadcast system specific data for DVB systems specific operand is illustrated in Figure 9. The fields are the same as for the control command.

In response to a CA enable status and notify command, the CA subunit makes a response. The broadcast system specific data for the DVB system specific operands is illustrated in Figure 10.

5 The fields are the same as for the COMMAND response with the exception of the *status* field, which can take the values defined below. The "remove" action is not valid for STATUS or NOTIFY commands.

	<b>action</b>	<b>status</b>	<b>Value</b>
	add	descrambling will be possible	00 <sub>16</sub>
	add	descrambling will be possible under conditions (purchase dialog)	01 <sub>16</sub>
10	add	descrambling will be possible under conditions (technical dialog)	02 <sub>16</sub>
	update	descrambling will be possible	10 <sub>16</sub>
	update	descrambling will be possible under conditions (purchase dialog)	11 <sub>16</sub>
	update	descrambling will be possible under conditions (technical dialog)	12 <sub>16</sub>
	add	descrambling will not be possible	80 <sub>16</sub>
15	add	descrambling will not be possible (because no entitlement)	81 <sub>16</sub>
	add	descrambling will not be possible (for technical reasons)	82 <sub>16</sub>
	add	descrambling will not be possible (Insufficient bandwidth in CA subunit)	83 <sub>16</sub>
	add	descrambling will not be possible (Incompatible CA system)	84 <sub>16</sub>
20	update	descrambling will not be possible	90 <sub>16</sub>
	update	descrambling will not be possible (because no entitlement)	91 <sub>16</sub>
	update	descrambling will not be possible (for technical reasons)	92 <sub>16</sub>
	update	descrambling will not be possible (Insufficient bandwidth in CA subunit)	93 <sub>16</sub>
	update	descrambling will not be possible (Incompatible CA system)	94 <sub>16</sub>

## 25 CA Entitlement

The CA entitlement command may be used by EPG (Electronic Program Guide) applications to interrogate the CA subunit in order to determine what entitlement the user has to services found in the electronic program guide. For instance, when displaying the EPG, having interrogated the CA subunit to determine what programs can be descrambled, the EPG can indicate which of the programs the user is able to view. The command can be used with a ctype of STATUS and NOTIFY. This command does not prevent EPG and CA applications from the same or cooperating suppliers to develop private means of passing entitlement information. This command can be used by independent EPGs to interrogate CA modules.



The CA entitlement command is illustrated in Figure 11(a) with the broadcast systems specific data for the DVB system being illustrated in Figure 11(b).

The system ID field has the same meaning as for the CA enable command.

The operands network ID, original network ID, transport stream ID, service ID and event ID specify the service that the entitlement query is for. The event ID is fully qualified by the other location identifiers in the service information.

In response to a CA entitlement command, the CA subunit issues a response illustrated by Figure 12(a) with the broadcast system specific data for the DVB system illustrated in Figure 12(b).

The operands *network\_id*, *original\_network\_id*, *transport\_stream\_id*, *service\_id* and *event\_id* are the same as for the command. The *entitlement\_status* field denotes the whether or not the user has entitlement to the selected service.

value	entitlement_status	Description
00	entitlement unknown	The CA subunit cannot determine the entitlement status for this service
01	entitlement available	Entitlement for this service is currently available
02	entitlement not available	Entitlement for this event is not currently available and cannot be made available by any user dialogue with the CA subunit
03	user dialogue required	Entitlement is not currently available but could be made available after a user dialogue with the CA subunit
04	user dialogue complete unknown	The user dialogue is complete the entitlement is unknown
05	user dialogue complete available	The user dialogue is complete and entitlement has been granted
06	user dialogue complete not available	The user dialogue is complete and entitlement has not been granted
other values	reserved	The remaining values are reserved for future use

### Security

Although the concept of the CA Subunit is to allow generic receivers to work with multiple CA systems there may be some cases when a service provider  
5 will wish to associate a certain CA Subunit with a certain IRD (Integrated Receiver Decoder). In this case authentication is used between the CA Subunit and the IRD to ensure that each device only works with its respective partner.

The SECURITY command is illustrated in Figure 13 and is independent of  
10 broadcast system as it is uniquely defined for each application. The authentication protocol is a process whereby the IRD and CA Subunit pass between themselves control codes to allow each device to satisfy itself that the other is genuine. The authentication protocol could be as simple as transferring two known keys between the devices or a more complex key exchange based upon, for example, public key protocols.

15 The *category* field defines the authentication and key exchange protocol that is used in the following *category dependant field*.

### Implementation

20 The following provides an explanation as to how the CA Subunit can be implemented and the procedure that can be followed to make use of the CA Subunit.

The NCAM is a logical collection of subunits that provide the required  
25 functionality to implement a networked conditional access system. The CA subunit is the core of the system and relies on other subunits to provide a source and sink for the

material that requires descrambling and communication with both the user and outside world. As such the CA subunit should be aware of the tuner subunit and panel subunit.

The NCAM can be implemented with only the tuner, CA and Panel subunits;  
5 these are the minimum requirements. The resources that the CA system may also require such as a modem and/or smart card reader can be implemented and accessed privately when they form part of the same unit.

The procedure for decoding a scrambled transport stream is described with  
10 reference to Figure 14. The following assumes that the tuner subunit will be the source of the scrambled stream, either an off air signal via a suitable front end or directly from the demux via an alternative source such as a DVCR. The user will make a channel selection and the tuner subunit will detect that the stream is scrambled.

The controller can make an intelligent prediction as to which CA subunit to  
15 use based upon the CA\_system\_id field from the transport stream and CA\_system\_id of the CA subunit. For example in Figure 15 satellite IRD is connected to a CA Subunit via 1394.

The controller establishes an isochronous channel between the tuner and CA  
20 subunits to transmit the scrambled service to the CA subunit. A second channel from the CA subunit to the desired sink, this can be the unit that originates the scrambled source material or a separate unit, is set up. The 5C Copy Protection system or any other suitable alternative copy protection mechanism can be used to protect the descrambled  
25 transport stream from unauthorised copying.

The controller then sends the CA\_ENABLE command to inform the CA  
subunit of which service or services it would like descrambled. When the CA subunit  
receives the CA\_ENABLE command it determines whether or not it is capable of  
30 descrambling the selected service. This may involve setting up a dialogue with the user to determine whether they are prepared to pay for the service or request them to insert

-26-

their bank card or pin number. Some communication with the outside world via the modem may be required.

5 If following the user dialogue the CA subunit is capable of descrambling the selected services it updates its internal status registers and starts output the descrambled data.

10 Due to the nature of AV/C commands whereby each command requires a response, if the original CA\_ENABLE command is met with a REJECTED response due to a user or technical dialogue being required then once the dialogue is resolved the controller will not know the outcome. Therefore if a CA\_ENABLE command is rejected for dialogue reasons then the controller should send a NOTIFY command to be informed when the state of the CA subunit changes.

### 15 EMM Handling

In some implementations of a DTV receiver the CA module can receive EMMs whilst the DTV is in standby and on power states. This allows the CA module to continually update the entitlement that the user has.

20 In a network environment the TS must be routed to the CA subunit to allow the subunit to process the EMM packets. This means that if the CA subunit remains powered off or a TS is not connected to it for a period of time then the entitlement stored in the CA subunit may become out of date. Therefore at periodic intervals the CA subunit should contact the tuner subunit and request the TS for a period of time to allow it to update the EMMs. This should be done at times when the user experience will not be compromised. The controller should ensure that the channel is not changed while the user is watching a particular service.

30

-27-

No Tuner Subunit

5       The benefit of using a CA subunit in a network where a tuner subunit also exists comes when the controller is external to both the unit that contains the tuner subunit and the unit that contains the CA subunit. This allows the controller to discover the services that the tuner subunit is capable of receiving and can instruct the CA subunit to descramble a number of these services.

10       In some cases the CA subunit will exist in a network where there is no tuner subunit. In this case in order for a device to make use of the CA subunit the controller must exist in the same unit as that of the signal source. The controller must be capable of privately inspecting the transport stream and determining the PIDs of the elements of the service it wishes descrambled. Again the EMM stream must be included with the PIDs of the elements that are to be descrambled.

15

CLAIMS

1. A conditional access subunit for connection to an IEEE 1394 network, the subunit including:

5 means to receive AV/C Conditional Access Commands over the IEEE 1394 network from another subunit; and

means to transmit AV/C responses over the IEEE 1394 network in response to the received AV/C Conditional Access Commands.

2. A subunit for use with a conditional access subunit on an IEEE 1394 network, the subunit including:

10 means to transmit AV/C Conditional Access Commands over the IEEE 1394 network to the conditional access subunit; and

means to receive AV/C responses from the conditional access subunit over the IEEE 1394 network in response to the transmitted AV/C Conditional Access Commands.

15 3. A method of providing a Conditional Access Module on an IEEE 1394 network, the method comprising:

defining a Conditional Access Module as a Conditional Access Subunit of the IEEE 1394 network;

20 providing AV/C Conditional Access Commands to allow communication between the Conditional Access Subunit and other Subunits on the network.

4. A subunit according to claim 1 wherein the AV/C Conditional Access Commands include a CA enable command.

5. A subunit according to claim 4 wherein the AV/C op code for the CA enable command is CC<sub>16</sub>.

-29-

6. A subunit according to claim 4 wherein the CA enable command includes a system ID for identifying the broadcast system to which the command relates.

5 7. A subunit according to claim 4 wherein CA enable control commands include an action operand which is able to represent at least add, update, remove and remove all actions.

10 8. A subunit according to claim 4 wherein CA enable control command responses include an action operand corresponding to the action operand of a received CA enable control command and a status operand wherein, for an action operand representing an add action, the status operand is able to represent at least descrambling, descrambling possible under conditions (purchase dialogue) and descrambling possible under conditions (technical dialogue), for an action operand representing an update action, the status operand is able to represent at least descrambling, descrambling possible under conditions (purchase dialogue) and descrambling possible under conditions (technical dialogue status), for an action operand representing a remove action, the status operand is able to represent at least a remove successful status and, for an action operand representing a remove all action, the status operand is able to represent at least a remove successful status.

20 9. A subunit according to claim 4 wherein CA enable status and notify commands include an action operand able to represent at least one of an add, update, remove and remove all action.

25 10. A subunit according to claim 9 wherein CA enable status and notify command responses include an action operand corresponding to the action operand of the CA enable status and notify command and a status operand wherein, for an action operand representing an add action, the status operand is able to represent at least one of descrambling will be possible, descrambling will be possible under conditions (purchase dialogue), descrambling will be possible under conditions (technical dialogue), descrambling will not be possible, descrambling will not be possible (because no entitlement), descrambling

-30-

will not be possible (for technical reasons), descrambling will not be possible (insufficient bandwidth in CA subunit) and descrambling will not be possible (incompatible CA system) and for an action operand representing an update action, the status operand is able to represent at least descrambling will be possible,

5 descrambling will be possible under conditions (purchase dialogue), descrambling will be possible under conditions (technical dialogue), descrambling will not be possible, descrambling will not be possible (because no entitlement), descrambling will not be possible (for technical reasons), descrambling will not be possible (insufficient bandwidth in CA subunit) and descrambling will not be possible

10 (incompatible CA system).

11. A subunit according to claim 4 wherein the CA enable command includes a service ID operand for specifying the service to which the program map PID is applicable.

12. A subunit according to claim 4

15 wherein the CA enable command includes an operand for specifying the number of elementary PID definitions to follow, together with operands including elementary PID definitions.

13. A subunit according to claim 12 wherein each of the elementary PID definitions include a stream type operand for identifying the type of

20 service element carried within the packets with the PID whose value is specified by the elementary PID and elementary PID operands for specifying the PID of the transport stream packets that carry the associated service element.

14. A subunit according to claim 1 wherein the AV/C Conditional Access Commands include a CA entitlement command.

25 15. A subunit according to claim 14 wherein the AV/C opcode for the CA entitlement command is CD<sub>16</sub>.



-31-

16. A subunit according to claim 14 wherein the CA entitlement command includes a system ID for identifying the broadcast system to which the command relates.

5 17. A subunit according to claim 14 wherein the CA entitlement command includes operands defining broadcast systems specific data.

18. A subunit according to claim 17 wherein the broadcast systems specific data is able to represent at least the network ID, the original network ID, the transport stream ID, the service ID and the event ID.

10 19. A subunit according to claim 14 wherein, for a CA entitlement command response, the response has an operand able to represent entitlement status.

15 20. A subunit according to claim 19 wherein the entitlement status operand is able to represent at least entitlement unknown, entitlement available, entitlement not available, user dialogue required, user dialogue complete unknown, user dialogue complete available and user dialogue complete not available.

21. A subunit according to claim 1 wherein the AV/C Conditional Access Commands include a security command.

20 22. A subunit according to claim 21 wherein the AV/C opcode for the security command is  $0F_{16}$ .

23. A subunit according to claim 20 wherein the security command includes operands for defining authentication and key exchange protocols.

-32-

24. A subunit according to claim 21 wherein the subunit will only transmit data once it has received appropriate authentication from the receiving subunit.

5 25. A conditional access subunit for connection to an IEEE 1394 network for use in descrambling a transport stream received over the network wherein the conditional access subunit, having descrambled the transport stream, introduces a local scrambling before retransmitting the transport stream to other subunits on the network, such that only authorised subunits on the network capable of local descrambling can receive the information in the transport stream.

10 26. A conditional access subunit for connection to an IEEE 1394 network having a tuner subunit, the conditional access subunit having means for periodically contacting the tuner subunit to request the received transport stream for a period of time sufficient to allow the conditional access subunit to update the entitlement management messages stored in the conditional access subunit.

15 27. An IEEE 1394 network including a conditional access subunit according to claim 26, a tuner subunit and a control subunit wherein the control subunit ensures that the request from the conditional access subunit to the tuner unit does not cause the tuner unit to change channel while a user is making use of a particular service.

20 28. A tuner device having an embedded conditional access subunit according to claim 1

1/15

Fig.1.

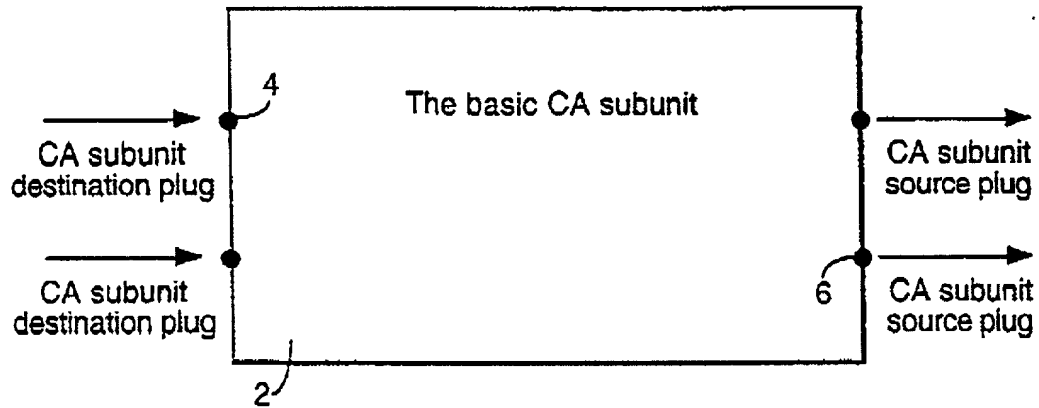


Fig.2.

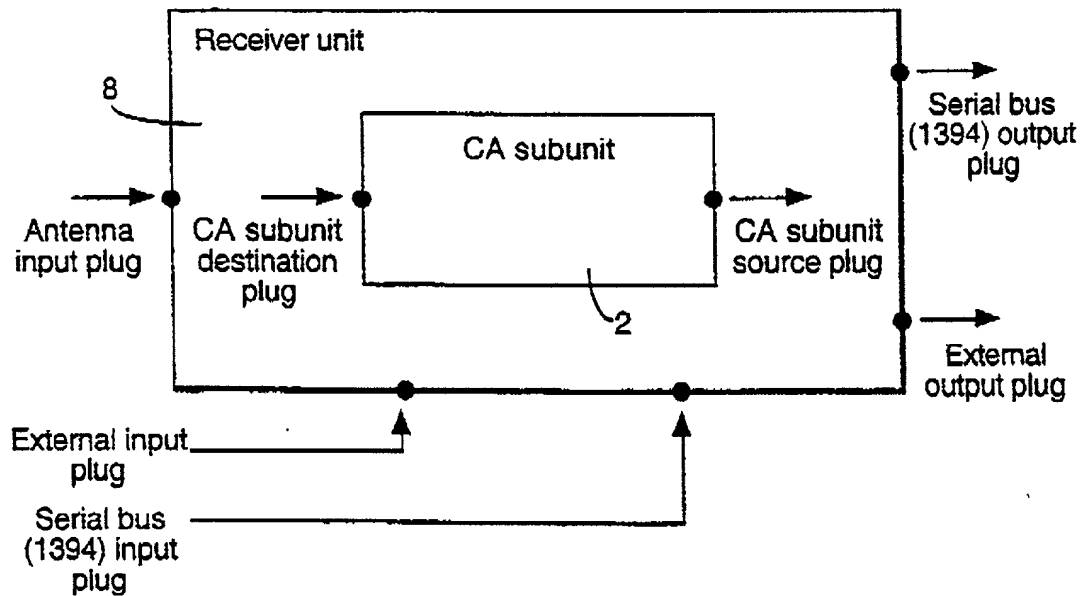


Fig.3.

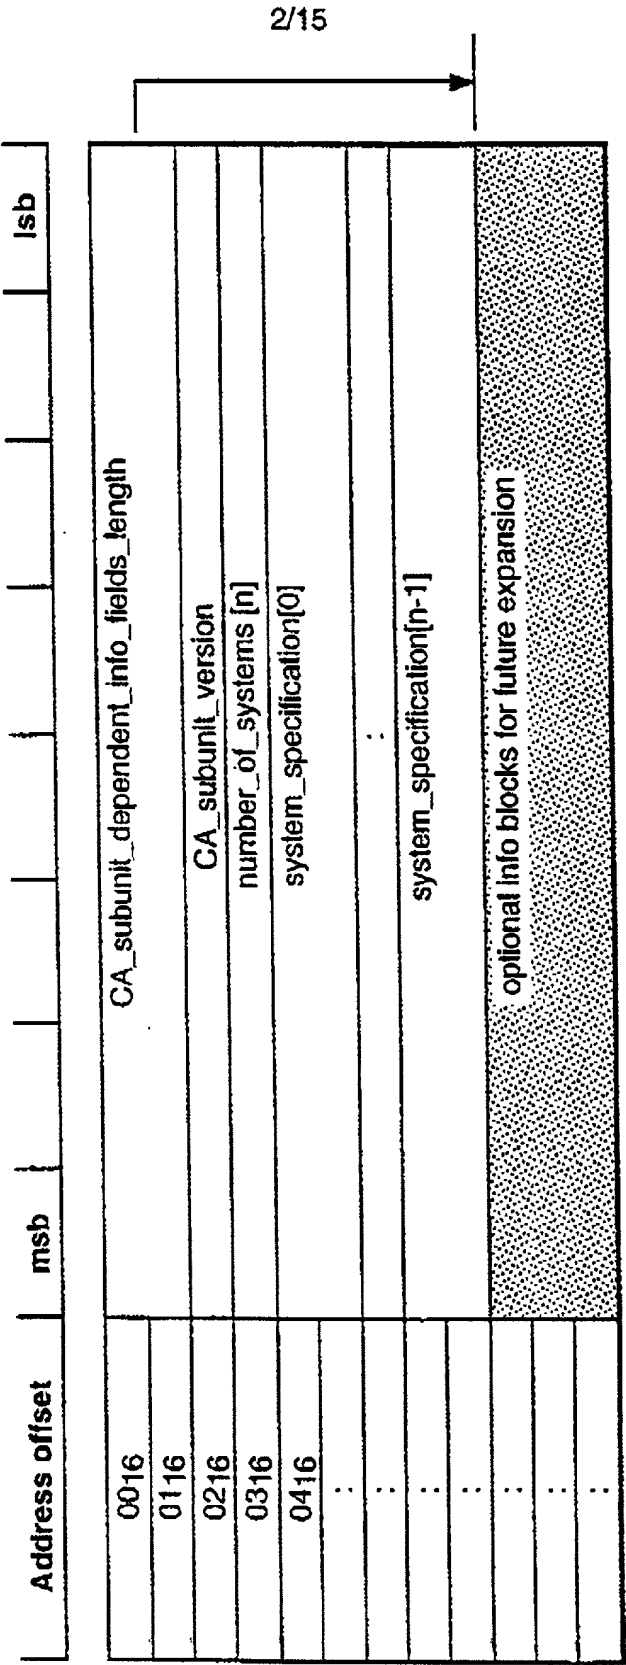


Fig.4.

Address offset	msb	lsb
0016	specification_length	
0116		
0216	system_id	
0316	implementation_profile_id	
0416	number_of_CA_system_ids(m)	
0516	CA_system_id_length[0]	
:	CA_system_id[0]	
:		
:		
:	:	
:	CA_system_id_length[m-1]	
:		
:	CA_system_id[m-1]	
:		

4/15

Fig.5(a).

Address offset	msb	lsb
00 0016	descriptor_length	
00 0116		
00 0216		
:	general_CA_subunit_status_info_block	
:		
:		
:	source_plug_status_area_info_block	
:		
:		

Fig.5(b).

Address offset	msb	lsb
00 0016	compound_length	
00 0116		
00 0216		
00 0316	info_block_type=90 0016(general_CA_subunit_status_area_info_block)	
00 0416		
00 0516		
00 0616	primary_field_length	
00 0716		
00 0816		
00 0916	reserved	
00 0A16		
00 0B16		
00 0C16	available_bandwidth_upper	
00 0D16		
00 0E16		
00 0F16	available_bandwidth_lower	
00 1016		
00 1116		

Fig.5(c).

Address offset	msb	lsb
0016	compound_length	
0116		
0216	info_block_type=90 0116(source_plug_status_area_info_block)	
0316		
0416	primary_fields_length	
0516		
0616	number_of_source_plugs (n)	
0716		
:	nested_plug_status_info_block_structures	
:		

6/15

Fig.5(d).

Address offset	msb	lsb
00 0016	compound_length	
00 0116		
00 0216	info_block_type=90 0216(plug_status_info_block)	
00 0316		
00 0416	primary_fields_length	
00 0516		
00 0616	source_plug	
00 0716	destination_plug	
00 0816	status	



7/15

Fig.6.

Opcode	Value	ctype			Comments
		C	S	N	
CA_ENABLE	CC16	✓	✓	✓	Used to instruct the CA subunit to begin descrambling the service defined in the broadcast specific data
CA_ENTITLEMENT	CD16	—	✓	✓	Used to allow a controller to query the CA subunit to determine whether the user has entitlement for a specified service
SECURITY	OF16	✓	✓	✓	Used for validation purposes between a controller and the CA subunit

Fig.7(a).

opcode	msb												lsb
operand[0]	CA_ENABLE (CC16)												
operand[1]	system_id												
:	broadcast_system_specific_data												
:													

Fig.7(b).

	msb																	lsb
operand [1]	action																	
operand [2]	FF16																	
operand [3]	service_id																	
operand [4]																		
operand [5]	number_of_elementary_PID_definitions[m]																	
operand [6]																		
operand [7]	elementary_PID_definition[1]																	
operand [8]																		
:	:																	
operand [x]																		
operand [x+1]	elementary_PID_definition[m-1]																	
operand [x+2]																		

Fig.7(c).

operand [x]	msb																			lsb
operand [x+1]		stream_type																		
operand [x+2]		elementary_PID																		

9/15

Fig.8(a).

opcode	msb																	lsb
operand [0]	CA-ENABLE (CC16)																	
operand [1]	system_id																	
:	broadcast_system_specific_data																	
:																		

Fig.8(b).

operand [1]	msb																	lsb
operand [2]	action																	
operand [3]	status																	
operand [4]	service_id																	
operand [5]	number_of_elementary_PID_definitions[m]																	
operand [6]	elementary_PID_definition[1]																	
operand [7]																		
operand [8]																		
:																		
operand [x]	elementary_PID_definition[m-1]																	
operand [x+1]																		
operand [x+2]																		

Fig.9.

msb		lsb
operand [1]	action FF16 service_id	
operand [2]		
operand [3]		
operand [4]		
operand [5]	number_of_elementary_PID_definitions[m]  elementary_PID_definition[1]  :  elementary_PID_definition[m-1]	
operand [6]		
operand [7]		
operand [8]		
:		
operand [x]		
operand [x+1]		
operand [x+2]		

11/15

Fig.10.

	msb																		lsb
operand [1]	action																		
operand [2]	status																		
operand [3]	service_id																		
operand [4]																			
operand [5]	number_of_elementary_PID_definitions[m]																		
operand [6]	elementary_PID_definition{1}																		
operand [7]																			
operand [8]																			
:	:																		
operand [x]	elementary_PID_definition[m-1]																		
operand [x+1]																			
operand [x+2]																			

12/15

Fig.11(a).

opcode	msb	CA_ENTITLEMENT (CD16)	lsb
operand [0]		system_id	
operand {1}			
:		broadcast_system_specific_data	
:			

Fig.11(b).

operand [1]	msb	network_id	lsb
operand [2]			
operand [3]		original_network_id	
operand [4]			
operand [5]		transport_stream_id	
operand [6]			
operand [7]		service_id	
operand [8]			
operand [9]		event_id	
operand [10]			
operand {11}		FF-16	

13/15

Fig.12(a).

opcode	msb																			lsb
operand [0]	CA_ENTITLEMENT (CD16)																			
operand [1]	system_id																			
:	broadcast_system_specific_data																			
:																				

Fig.12(b).

operand [1]	msb																			lsb
operand [2]	network_id																			
operand [3]	original_network_id																			
operand [4]	transport_stream_id																			
operand [5]																				
operand [6]	service_id																			
operand [7]																				
operand [8]	event_id																			
operand [9]																				
operand [10]	entitlement_status																			
operand [11]																				

Fig.13.



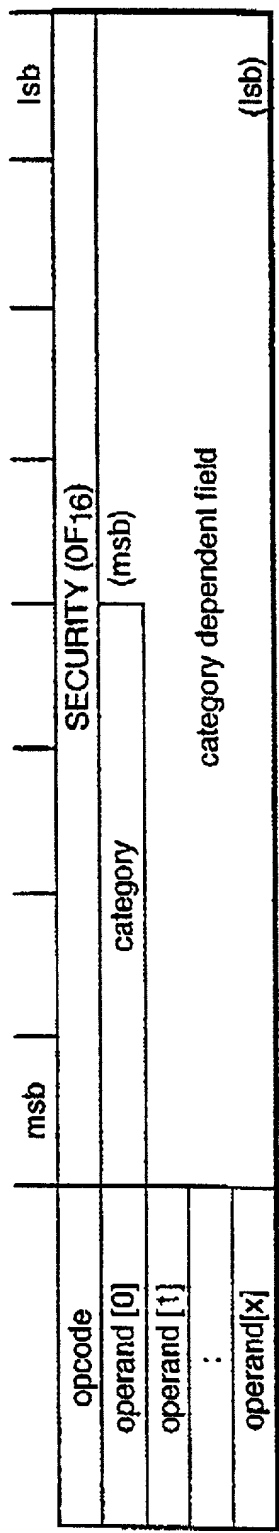


Fig.15.



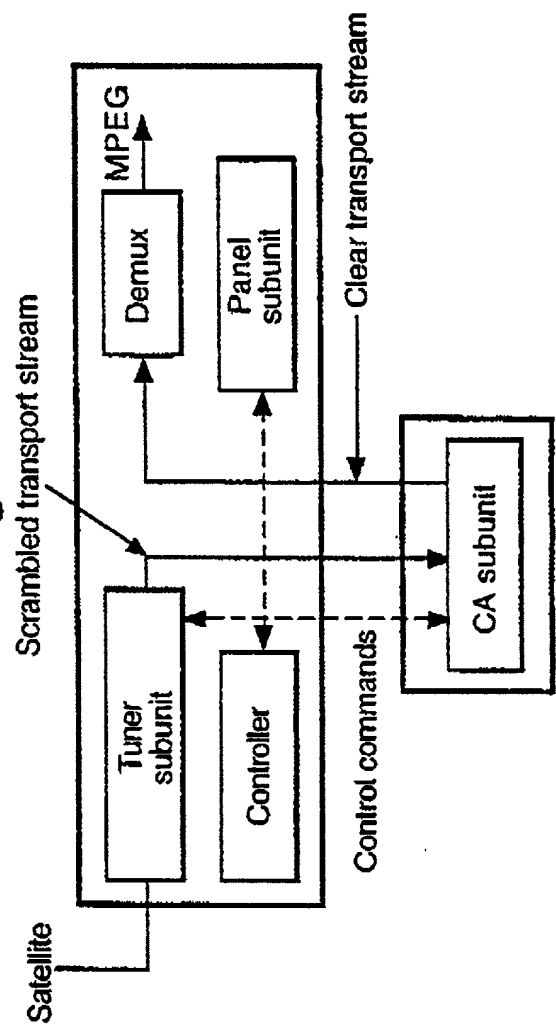

15/15

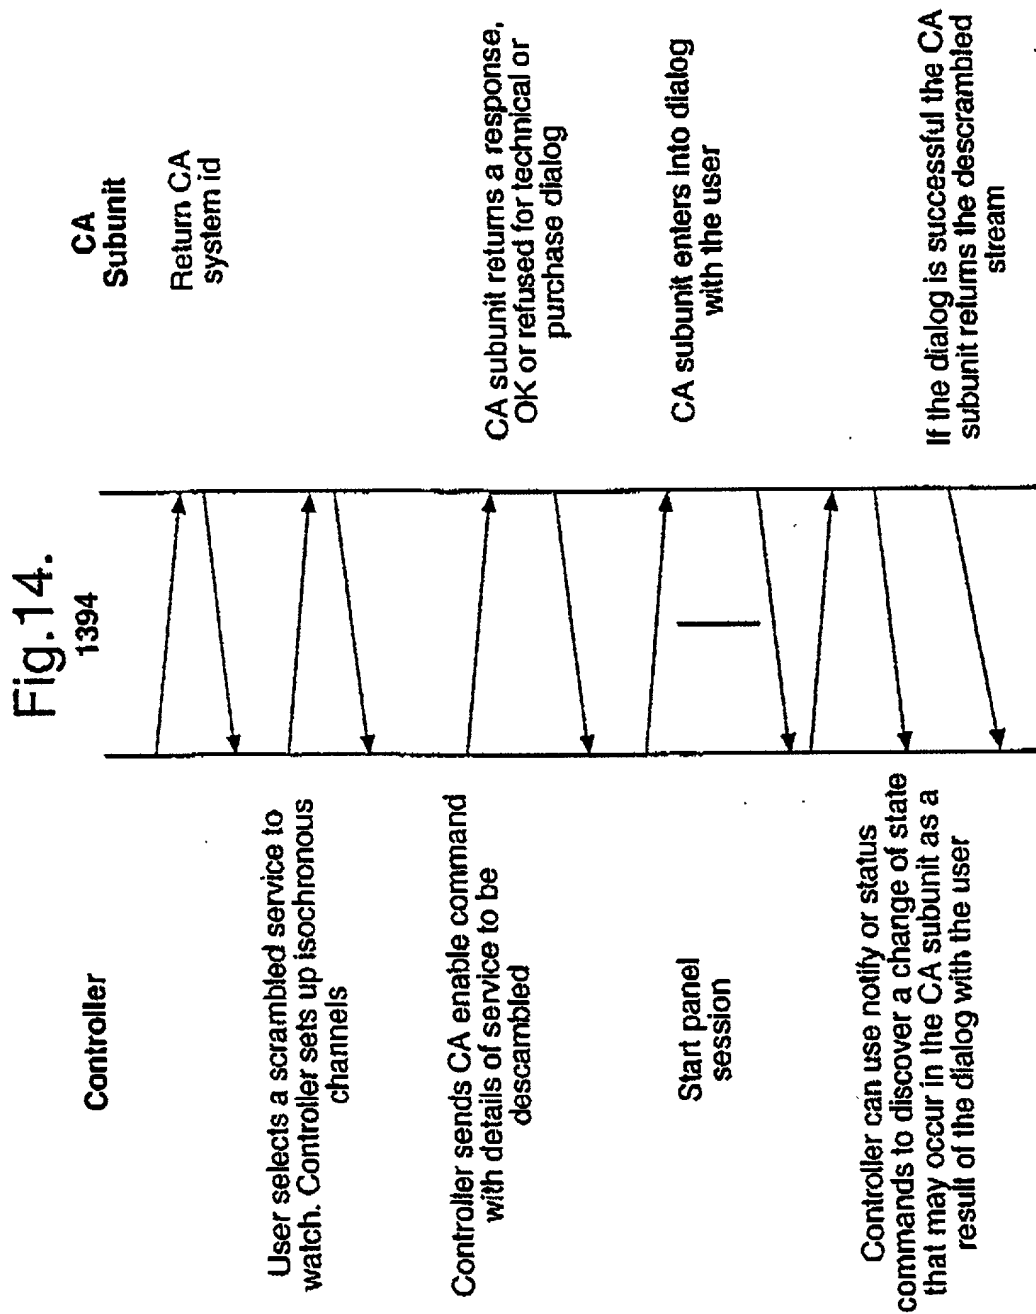

I-98-19

DECLARATION FOR PATENT APPLICATION (JOINT OR SOLE)

(Under 37 CFR § 1.63; with Power of Attorney)

FROMMER LAWRENCE & HAUG LLP

FLH File No. 450110-02873

As a below named inventor, I hereby declare that:  
My residence, post office address and citizenship are as stated below next to my name,  
I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention ENTITLED:

NETWORKED CONDITIONAL ACCESS MODULE

the specification of which

is attached hereto.

X was filed on 5 May 1999 as International Application Serial No. PCT/GB99/01392,

with amendment(s) through (if applicable, give dates).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s) [List additional applications on separate page]: Priority Claimed:  
Number: Country: Filed (Day/Month/Year): Yes No

PCT/GB99/01392

PCT

5 May 1999

X

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56, which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Prior U.S. Application(s) [List additional applications on separate page]:  
Appln. Ser. Number: Filed (Day/Month/Year): Status (patented, pending, abandoned):

I hereby appoint WILLIAM S. FROMMER, Registration No. 25,506, and DENNIS M. SMID, Registration No. 34,930 or their duly appointed associate, my attorneys, with full power of substitution and revocation, to prosecute this application, to make alterations and amendments therein, to file continuation and divisional applications thereof, to receive the Patent, and to transact all business in the Patent and Trademark Office and in the Courts in connection therewith, and specify that all communications about the application are to be directed to the following correspondence address:

WILLIAM S. FROMMER, Esq.  
c/o FROMMER LAWRENCE & HAUG LLP  
745 Fifth Avenue  
New York, New York 10151

Direct all telephone calls to:  
(212) 588-0800  
to the attention of:  
WILLIAM S. FROMMER

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

INVENTOR(S): R. J. Barry Date: 3/11/00  
Signature: Date: 3/11/00  
Full name of sole or first inventor: RICHARD JOHN BARRY  
Residence: 19 ST. GABRIELS LEA, CHINEHAM, BASINGSTOKE, HAMPSHIRE, RG24 8RE, UNITED KINGDOM  
Citizenship: BRITISH  
Signature: Date: 3/11/00  
Full name of 2nd joint inventor (if any): ADRIAN CHARLES PASKINS  
Residence: 14 STRATTON ROAD, CRANBOURNE, BASINGSTOKE, HAMPSHIRE, RG21 3NZ, UNITED KINGDOM  
Citizenship: BRITISH  
Signature: Date: 3/11/00  
Full name of 3rd joint inventor (if any):  
Residence:  
Citizenship:

[Similarly list additional inventors on separate page]  
Post Office Address(es) of inventor(s):  
[if all inventors have the same post office address]

SONY UNITED KINGDOM LIMITED  
The Heights, Brooklands  
Weybridge KT13 0XW, England, United Kingdom

Note: In order to qualify for reduced fees available to Small Entities, each inventor and any other individual or entity having rights to the invention must also sign an appropriate separate "Verified Statement (Declaration) Claiming [or Supporting a Claim by Another for] Small Entity Status" form [e.g. for Independent Inventor, Small Business Concern, Nonprofit Organization, individual Non-Inventor].

Note: A post office address must be provided for each inventor.